


Rundrohre in H-PVC, ABS möglich

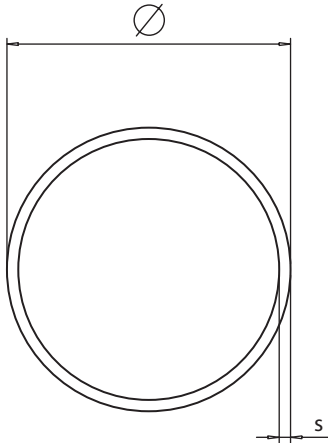

Art.-Nr.	∅	Stärke s	Gewicht g/m	Mindestmenge / m
692.1	6,0	0,8	18	2000
1810	8,0	1,5	46	700
949	10,0	0,9	38	835
1017	10,0	2,5	90	365
950	12,0	1,0	50	600
661	14,0	1,4	88	365
662.08	15,0	0,8		
662	15,0	1,5	95	335
1797	15,0	2,0	123	300
226	16,0	1,5	102	300
1781	16,0	3,0	185	200
675	16,0	4,0	225	300
663	18,0	1,5	115	300
664	19,0	1,4	120	300
1154	19,0	3,0	225	150
2205	19,7	2,0		
665	20,0	1,4		
1798	20,0	1,5	130	300
666	21,5	1,4	140	300
2284	24,7	2,35		
2196	25,5	2,25		
668.1	28,0	1,0	122	250
668	28,0	1,5	185	300
2186	28,0	2,0	209	150
566	28,0	3,5	380	200
1300	29,0	4,5		
2221	31,0	2,5		
2189	31,0	4,5	503	60
2185	32,0	2,0	134	230
1581	32,5	1,5	238	150
2176	33,0	3,5	480	60
221	40,0	2,0	355	200
676	50,0	2,0	430	70
1199	53,0	0,8	220	200
1983	69,5	1,5	472	60
2305	80,0	1,0	381	80

Maß und Formänderung vorbehalten.

- Seite 1 von 1 -