

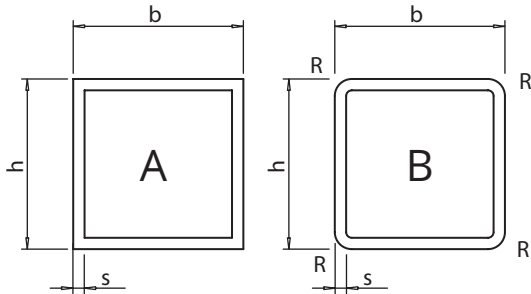



Quadrat-/Rechteckrohre
in H-PVC, ABS möglich

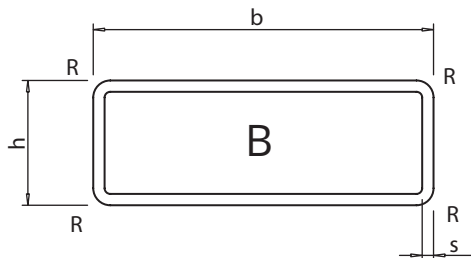

Art.-Nr.	Form	Breite b	Höhe h	Stärke s	Gewicht g/m	Mindestmenge / m
2086	A	6,4	6,4	1,2	32	1000
177	B	16,0	16,0	2,0	160	190
178	B	20,0	20,0	2,0	210	150
144	A	26,0	26,0	2,0	285	110
618	A	32,0	32,0	3,0	2	60
180	A	33,0	33,0	1,5	280	170
177	B	16,0	16,0	2,0	160	190
178	B	20,0	20,0	2,0	210	150

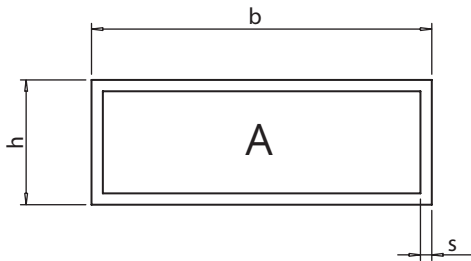

Art.-Nr.	Form	Breite b	Höhe h	Stärke s	Gewicht g/m	Mindestmenge / m
334	A	16,0	8,0	3,0	170	200
335	A	20,0	8,0	3,0	198	160
1845	A	20,0	10,0	2,0	154	200
2680	A	22,0	13,5	1,5	148	200
1429	A	22,0	13,5	2,0	190	160
131	A	35,0	21,0	1,0	145	200
941	A	40,0	12,0	2,0	300	180
1871	A	40,0	30,0	2,0	395	100
469	A	50,0	22,0	2,2	450	70
1557.1	B	73	50,5	2,5	930	35
1987	A	60,0	22,0	2,0	460	70
1075	B	65,0	39,0	2,0	600	60
101	B	80,0	30,0	2,0	600	50
1172	B	81,0	48,5	2,0	780	50
1962	*	85,0	25,0	2,0	657	450
1952	A	86,0	58,0	4,0	1543	20
1931	B	102,0	46,0	5,0	2000	20
655	B	109,0	54,0	1,8	855	40
1717	B	125,0	100,0	2,0	1380	25
2256	B	149,0	46,0	5,0	2465	20
2255	B	156,0	54,0	3,0	1700	20
1738	C	24,0	22,0	2,0	294	170
2127	C	65,0	25,0	3,0	840	40

*mit 2 Innenstegen